

Bulb Heat Lamp 120 Volts, 4.0 amps, 60 hz.

- **Grill**

White, polymeric grill (flame retardant ABS UL rated 94-5V) secured in place with torsion springs; easily removed if necessary, dimensions - 16 1/2" x 10".

- **Heater Housing**

23 gauge painted steel housing. Dimensions 13 7/8" x 8" x 5 7/8".

- **Lamping Information**

2 - 250 watt maximum, type R40 bulb, medium base, 1700 Btu.

- **Duct Collar**

Plastic collar for 4" duct connection, comes complete with built in non-metallic back draft damper for quiet operation.

- **Unit Mounting**


The housing will mount in ceilings with at least 6" of clearance and through drywall thickness up to 3/4", with a rough-in opening of 13 7/8" x 8". Rated for ceilings insulated to R-40. The housing will mount between 16" on center joists, using the 4 supplied housing mounting rails.

- **Single Pack Shipping Info**

Box Dim: 12 1/2" x 16 3/4" x 8"

UPC: 0-8316227031-3

Shipping Weight: 8 lbs.

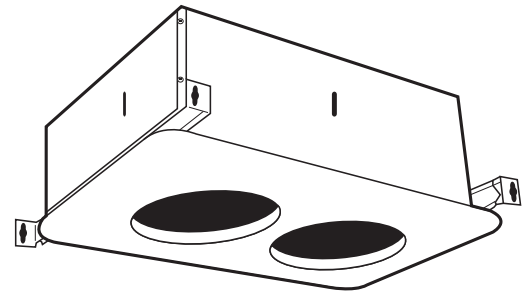

CUL - TYPE IC RATED

PROJECT							ARCHITECT			
LOCATION							ENGINEER			
CONTRACTOR							SUBMITTED BY		DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	



U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (877)-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Ontario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015